

SHALLCO SERIES 26

Part Number: 26305E

General:

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 VAC and 250 VDC resistive loads

Electrical:

RATINGS:

- 25A/120 VAC
- 15A/600 VAC
- 20A/600 VAC (RES)
- 3A/125 VDC
- 1A/250 VDC



- * Current carrying capacity: 25 amperes
- * Dielectric Withstanding Voltage: 2200 Vrms
- * Contact Resistance: Initial, 10 milliohms max.
- * Insulation Resistance: 100 Megohms min., initial

Mechanical:

- * Sections: 5
- * Positions: 8, Adjustable with handle removable in the "Off" position
- * Indexing: 45°
- * Rotational Life: 65,000 operations

Materials and Finishes:



- * Rotors and Stators: Thermoset Plastic, UL 94VO
- * Rotor contacts: Phosphor bronze
- * Stator contacts: Silver plated copper, screw type
- * Terminal hardware: silver plated brass
- * Exterior Metal: Steel with zinc chromate finish
- * Knob: thermoset phenolic



308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

SECTION	CONTACTS	POSITIONS						
		1	2	3	4	5	6	7
1	11-O12		X					
	11-O13		X					
	11-O14			X				
	11-O15				X			
	11-O16					X		
	11-O17						X	
	11-O18							X
2	21-O22		X					
	21-O23		X					
	21-O24			X				
	21-O25				X			
	21-O26					X		
	21-O27						X	
	21-O28							X
3	31-O32		X					
	31-O33		X					
	31-O34			X				
	31-O35				X			
	31-O36					X		
	31-O37						X	
	31-O38							X
4	41-O42		X					
	41-O43		X					
	41-O44			X				
	41-O45				X			
	41-O46					X		
	41-O47						X	
	41-O48							X
5	51-O52		X					
	51-O53		X					
	51-O54			X				
	51-O55				X			
	51-O56					X		
	51-O57						X	
	51-O58							X

HANDLE(REMOVABLE)

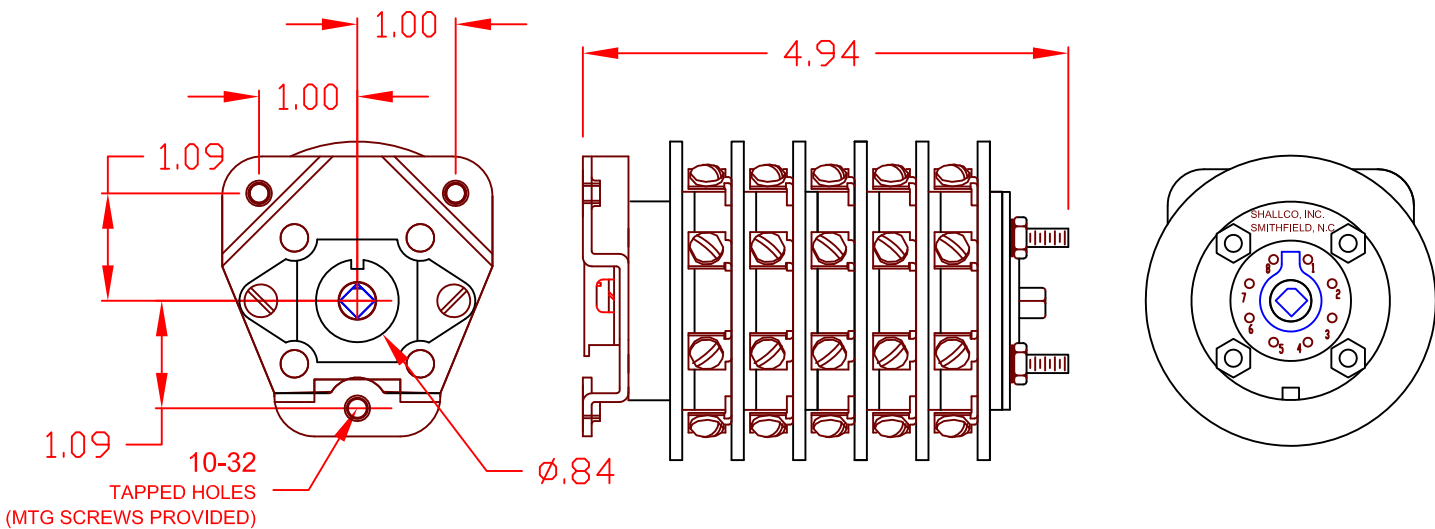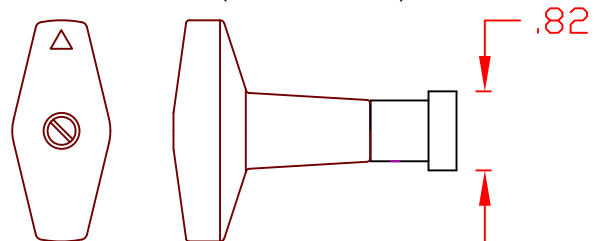

308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

26305E

REV. -