

SHALLCO SERIES 26

Part Number: 2652D

General:

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 VAC and 250 V DC resistive loads

Electrical:

* Ratings:

- 25A/120 VAC
- 15A/600 VAC
- 20A/600 VAC (RESISTIVE)
- 3A/125 VDC
- 1A/250 VDC



- * Current carrying capacity: 25 amperes
- * Dielectric Withstanding Voltage: 2200 Vrms
- * Contact Resistance: Initial, 10 milliohms max.
- * Insulation Resistance: 100 Megohms min., initial

Mechanical:

- * Sections: 5 active
- * Positions: 4

Extreme counterclockwise position is lockable by pulling shaft outward. Position 3 is rest. When switch is not in the "locked" position, shaft will return to the rest position.

* Schematic: as shown in the contact table.

- Decks 1,3 & 5 are Break-before-make
- Decks 3 & 4 are Make-before-break

* Rotational Life: 65,000 operations







Materials and Finishes:

- * Rotors and Stators: Thermoset Plastic, UL 94VO
- * Rotor contacts: Phosphor bronze
- * Stator contacts: Silver plated copper, screw type
- * Terminal hardware: silver plated brass
- * Exterior Metal: Steel with zinc chromate finish
- * Knob: thermoset phenolic




308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA



DECK	CONTACTS		POSITION				
			PULL - TL	TRIP	rest	pos	CLOSE
1	12	13					
	16	17					
2	21	22					
	25	26					
3	31	38					
4	41	48					
5	52	53					
	56	57					

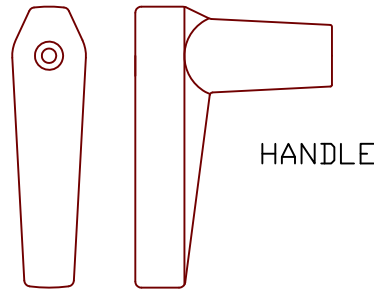

HANDLE



ESCUTCHEON PLATE

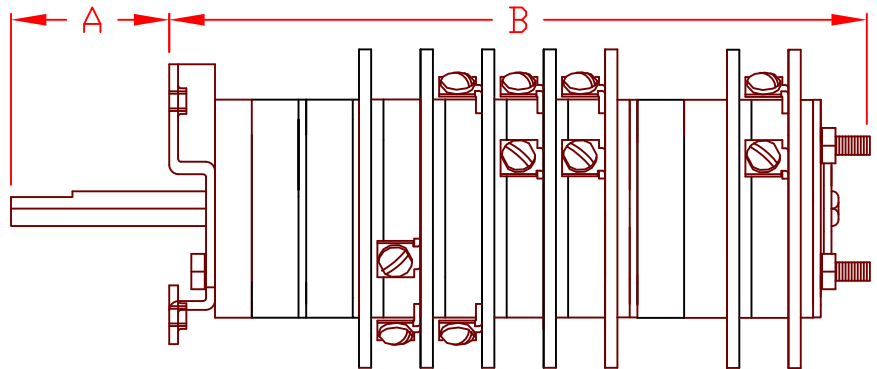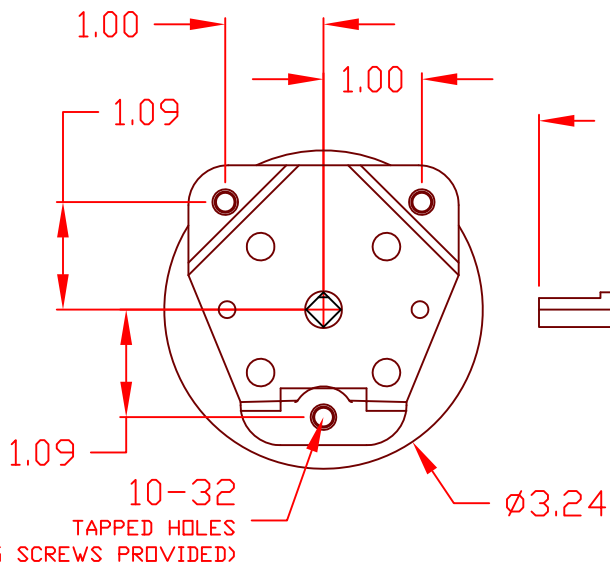

"A" DIM: 1.61 "B" DIM: 7.12

DESCRIPTION	2652D
	REV A



308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

TERMINAL SCREW TIGHTENING TORQUE: : 8 IN-LBS.