


**General:**

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 VDC resistive loads

**Electrical:**

\* Ratings:

- 25A/120 VAC
- 15A/600 VAC
- 20A/600 VAC (RESISTIVE)
- 3A/125 VDC
- 1A/250 VDC

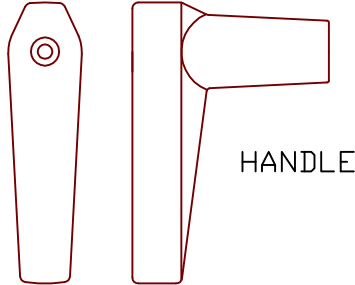

DECK	CONTACTS	TRIP	POS.		CLOSE
			nat	nac	
1	120-11-11-013				X
	160-11-11-017				X
2	210-11-11-028	X			
	240-11-11-025	X			
3	310-11-11-032		X	X	
	350-11-11-036		X	X	
4	420-11-11-043			X	X
	460-11-11-047			X	X
5	510-11-11-052	X	X		
	550-11-11-056	X	X		

- \* Current carrying capacity: 25 amperes
- \* Dielectric Withstanding Voltage: 2200 Vrms
- \* Contact Resistance: Initial, 10 milliohms max.
- \* Insulation Resistance: 100 Megohms min., initial

**Mechanical:**

- \* Sections: 5 active
- \* Positions: 2 Shaft will spring return to the center (rest) positions (See Truth Table and Operation)
- \* Operation: Non-shorting  
 Detent Type: Section 1 & 2 - Spring Return  
 Detent Type: Section 3 & 4 - Slip Detent
- \* Indexing: 45°
- \* Rotational Life: 65,000 operations

**Materials and Finishes:**

- \* Rotors and Stators: Thermoset Plastic, UL 94VO
- \* Rotor contacts: Phosphor bronze
- \* Stator contacts: Silver plated copper, screw type
- \* Terminal hardware: silver plated brass
- \* Exterior Metal: Steel with zinc chromate finish
- \* Knob: thermoset phenolic

MOUNTING HOLE DETAIL

