


General:

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 VDC resistive loads

Electrical:

* Ratings:

- 25A/120 VAC
- 15A/600 VAC
- 20A/600 VAC (RESISTIVE)
- 3A/125 VDC
- 1A/250 VDC

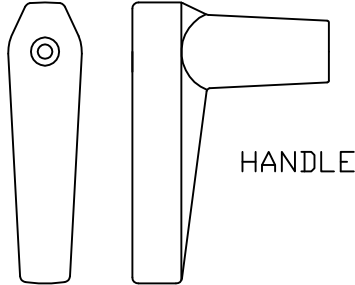

DECK	CONTACTS	TRIP	POS.		
			nat	nac	CLOSE
1	120-11-11-013				X
	160-11-11-017				X
2	210-11-11-028	X			
	240-11-11-025	X			
3	310-11-11-032		X	X	
	350-11-11-036		X	X	
4	420-11-11-043			X	X
	460-11-11-047			X	X
5	510-11-11-052	X	X		
	550-11-11-056	X	X		

- * Current carrying capacity: 25 amperes
- * Dielectric Withstanding Voltage: 2200 Vrms
- * Contact Resistance: Initial, 10 milliohms max.
- * Insulation Resistance: 100 Megohms min., initial

Mechanical:

- * Sections: 5 active
- * Positions: 2 Shaft will spring return to the center (rest) positions (See Truth Table and Operation)
- * Operation: Non-shorting
 Detent Type: Section 1 & 2 - Spring Return
 Detent Type: Section 3 & 4 - Slip Detent
- * Indexing: 45°
- * Rotational Life: 65,000 operations

Materials and Finishes:

- * Rotors and Stators: Thermoset Plastic, UL 94VO
- * Rotor contacts: Phosphor bronze
- * Stator contacts: Silver plated copper, screw type
- * Terminal hardware: silver plated brass
- * Exterior Metal: Steel with zinc chromate finish
- * Knob: thermoset phenolic

MOUNTING HOLE DETAIL

